



**98%**  
Natural

## **DLW Linoleum**

Marmorette - Colorette

Uni Walton - Lino Art

**Creative by Nature**

**Gerflor®**



# Summary

- 04. DLW, the genuine linoleum brand**
- 05. Key benefits of Linoleum**
- 06. Natural composition**
- 07. Cradle to Cradle**
- 08. Circular economy & Carbon neutral**
- 09. Gerflor Second Life & Eco Labels**
- 10. Protective by Nature**
- 12. The most complete offer**
- 13. Compact Linoleum**
  - 14. Product range
  - 29. Description text
  - 30. Technical data
- 31. Acoustic Linoleum**
  - 32. Product range
  - 34. Description text
  - 35. Technical data
- 36. Technic Linoleum**
  - 37. Product range
  - 38. Description text
  - 39. Technical data
- 40. More than a floor**
- 42. Cleaning instructions**
- 44. Mix & Match**
- 46. The proof is in the customer experience**

gerflor.com / follow us:



# Serving architecture since 1882

- **1863:** Invention of Linoleum by Sir Frederic Walton.
- **1882:** Foundation of DLW, the first linoleum brand in Germany and its factory is based in Delmenhorst (Germany)



**Historicism**  
1913  
Gabriel von Seidl  
Cityhall, **Bremen**



**Bauhaus**  
1927  
Mies van der Rohe  
Gropius Weissenhofsiedlung,  
**Stuttgart**



**Contemporary - Experimental & Minimalism**  
2008  
Herzog & Demeuron  
Olympic Stadium, **Beijing**



**Modern Movement**  
1957  
Le Corbusier  
Heilsberger apartments,  
**Berlin**



**Contemporary - Mars 1976 Movement**  
1992  
Jean Nouvel  
Hôtel Les Thermes, **Dax**

  
**DLW, the genuine Linoleum brand**  
part of Gerflor group since 2018

# Key Benefits of Linoleum



## Durability

- Inlaid product construction  
**Long lasting appearance**
- Hardwearing  
**Adapted to high pedestrian and mechanical traffic**
- Micro scratch resistance  
**No problem with tearings and scratches**



## Health

- Third part certified antiviral and antibacterial activity  
**Hygienic solution**
- Very low emissions  
TVOC < 10 microgram/m<sup>3</sup> after 28 days  
**Best indoor air quality**
- Neocare™ surface treatment (dirt and stain barrier)  
**Easy to clean**



## Comfort

- Resilient and soft surface  
**Child friendly**
- Up to 19dB sound insulation  
**Acoustic comfort**
- Suitable for underfloor heating  
**Thermal comfort**



## Design

- Selection of designs and colors  
**Freedom of choice**
- Matt effect  
**Contemporary finish**
- Mix and match possibilities  
**Creativity and differentiation**



# DLW Linoleum Creative by Nature

# 98%

natural

# 76%

Rapidly renewable

# Up to 40%

Recycled content

41%  
Linseed oil

20%  
Wood flour

19%  
Limestone



8%  
Jute

5%  
Resin

3%  
Coloured pigments



2%  
Cork




To fight climate emergency and natural resources depletion, every choice counts. DLW Linoleum is a 98% natural, low carbon and circular flooring solution.

**we care / we act**

# Sustainable by Nature

## Cradle to Cradle Certified™ SILVER<sup>(1)</sup>

Developed using circular economy principles

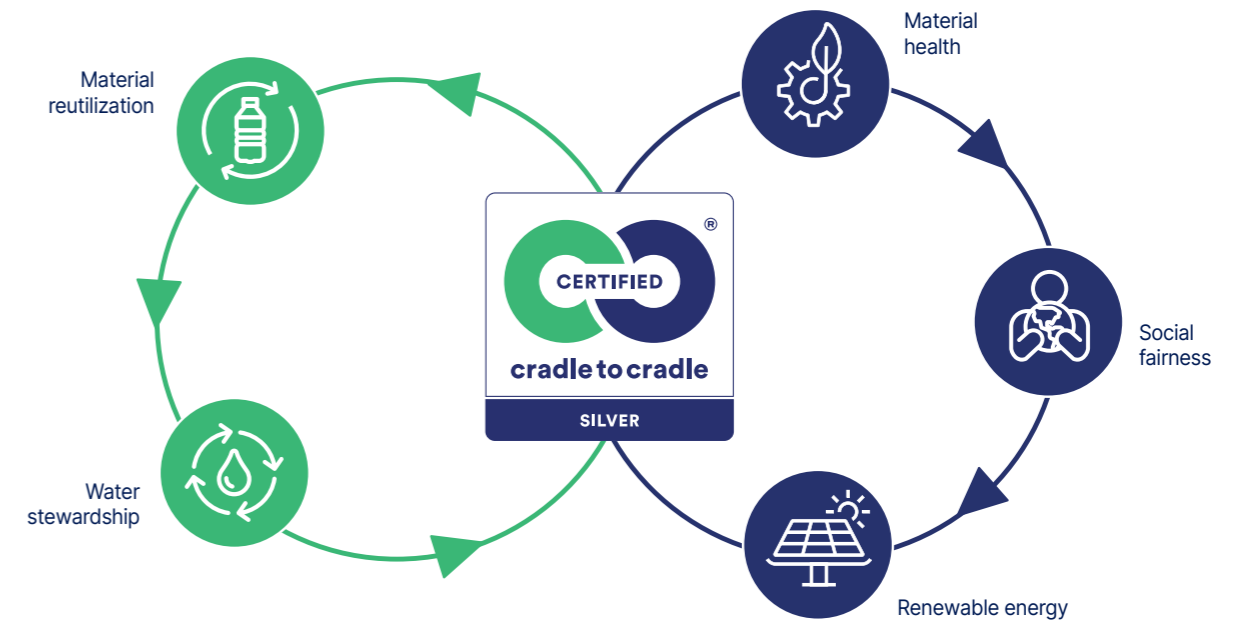

Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.



<sup>(1)</sup> Marmorette, Colorette, Uni Walton, Linodur, Marmorette Acoustic 15dB, Lino Art. / Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.

# Circular economy

DLW Linoleum products are developed according to a Life cycle analysis (LCA) methodology:

- To assess the existing product impact on the environment through all stages of its life cycle.
- To develop new products specifically designed to reduce their environmental impact.



# Carbon neutral\*



Our CO<sub>2</sub> emissions are neutral during the first stages of the product life cycle, from the growing of raw materials to the end of the production process.



All the details can be found in our Environmental Product Declaration, which has been third part certified (EVEA laboratory) according to the guidelines of international certification body (UL).

\* From Cradle to Gate: includes raw materials and manufacturing process (A1-A3 stages of EPD)

# 100 % recyclable



All Gerflor floorings are 100% recyclable and eligible to **Gerflor Second Life collection and recycling program**. Free collection of installation waste is available in 10 countries.

# Eco Labels


## Quality



## Life cycle analysis



## Indoor air quality



# Protective by Nature

New Solvent-free surface protection developed exclusively for Linoleum.  
Extremely hard wearing due to triple laser uv cross-linking



## Indoor Air Quality

- Very low VOC emissions  
TVOC < 10microgram/m<sup>3</sup> after 28 days  
(ISO 16516)
- Certified according to the most demanding standards



## Natural Design

- Mat effect



LPX / PUR / others...



## Easy to Clean


- Dirt and stain barrier
- Cost effective maintenance
- Easy cleaning with a mop or any modern cleaning equipment

Detailed cleaning protocol available on [www.gerfor.com](http://www.gerfor.com)



Standard Linoleum

Neocare™

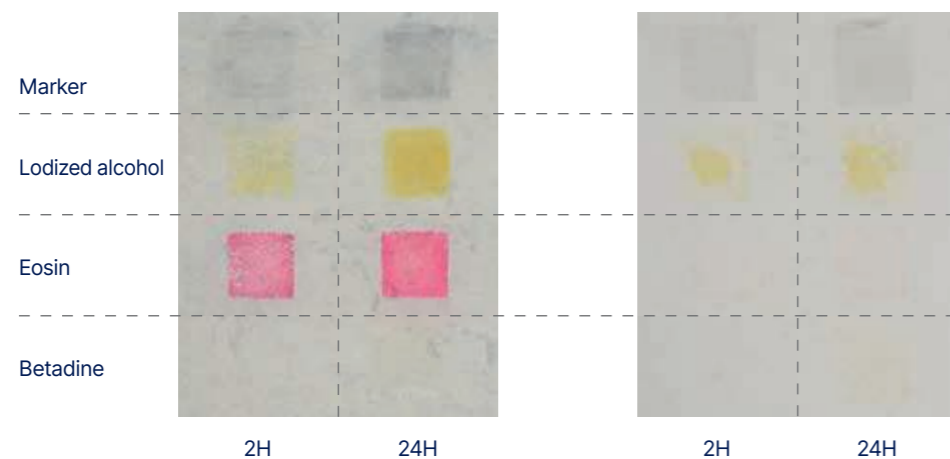

## Hygiene

DLW Linoleum floorings contribute to lower the microbe load (bacteria, virus, ...) and to minimise the risk of a contamination chain.

- Excellent resistance against disinfection chemicals
- Antiviral and antibacterial activity

### AntiBacterial Surfaces

Tests conducted by a third part lab (Isega) according to ISO 22196 / JIS Z 2801 standard, prove that DLW Linoleum floorings with Neocare™ surface treatment have antibacterial activity against E.coli - S.aureus - MRSA: our surfaces **inhibit growth of bacteria by 99,99% after 24h**


### AntiViral Surfaces

Tests conducted by a third part lab (Virhealth) according to ISO 21702 standard, prove that DLW Linoleum floorings with Neocare™ have antiviral activity against Human Coronaviruses: our surfaces **reduce the number of virus by 98.65% after 5h**.



## Durable

- No sealing and waxing needed
- Higher scratch resistance
- Easy to repair: in case of heavily damaged flooring, DLW linoleum can be easily repaired using the spray buffing method (red disk)

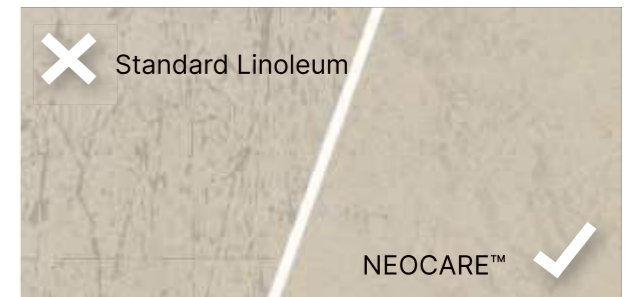

## Waxing

Neocare™ is a high performing surface treatment protecting against dirt, stains and scratches and does not require any sealing & waxing throughout the life of the product. Waxing remains an option.



Uni Walton  
0081 Nickel Grey

# The most complete offer

## Floors

**Compact Linoleum**  
2MM / 2.5MM / 3.2MM



Marmorette 2.5mm  
available in R10 & Bfl-s1

**Acoustic Linoleum**  
4MM

Acoustic 15dB / Acoustic Plus 19dB



• Customized colours

On Demand

## Technic Linoleum

**High mechanical traffic**  
4MM



**Dissipative Linoleum  
for ESD Area**  
2.5MM




$10^6 \leq R \leq 10^8$

**Sport Linoleum**

3.2MM / 4MM  
More information in sport brochure



## Finishes



Welding rods

## Camouflage



**Marmorette & Linodur**  
Camouflage welding rod:  
invisible joints.

## Uni



**Colorette, Uni  
Walton  
& Lino Art**  
Uni welding rod:  
a large palett of  
colors.

Welding rod matching table available on: [gerflor.com](http://gerflor.com)



Handrails




Wall  
Coverings  
& Protections



Entrance  
mats



Skirtings  
& Profiles

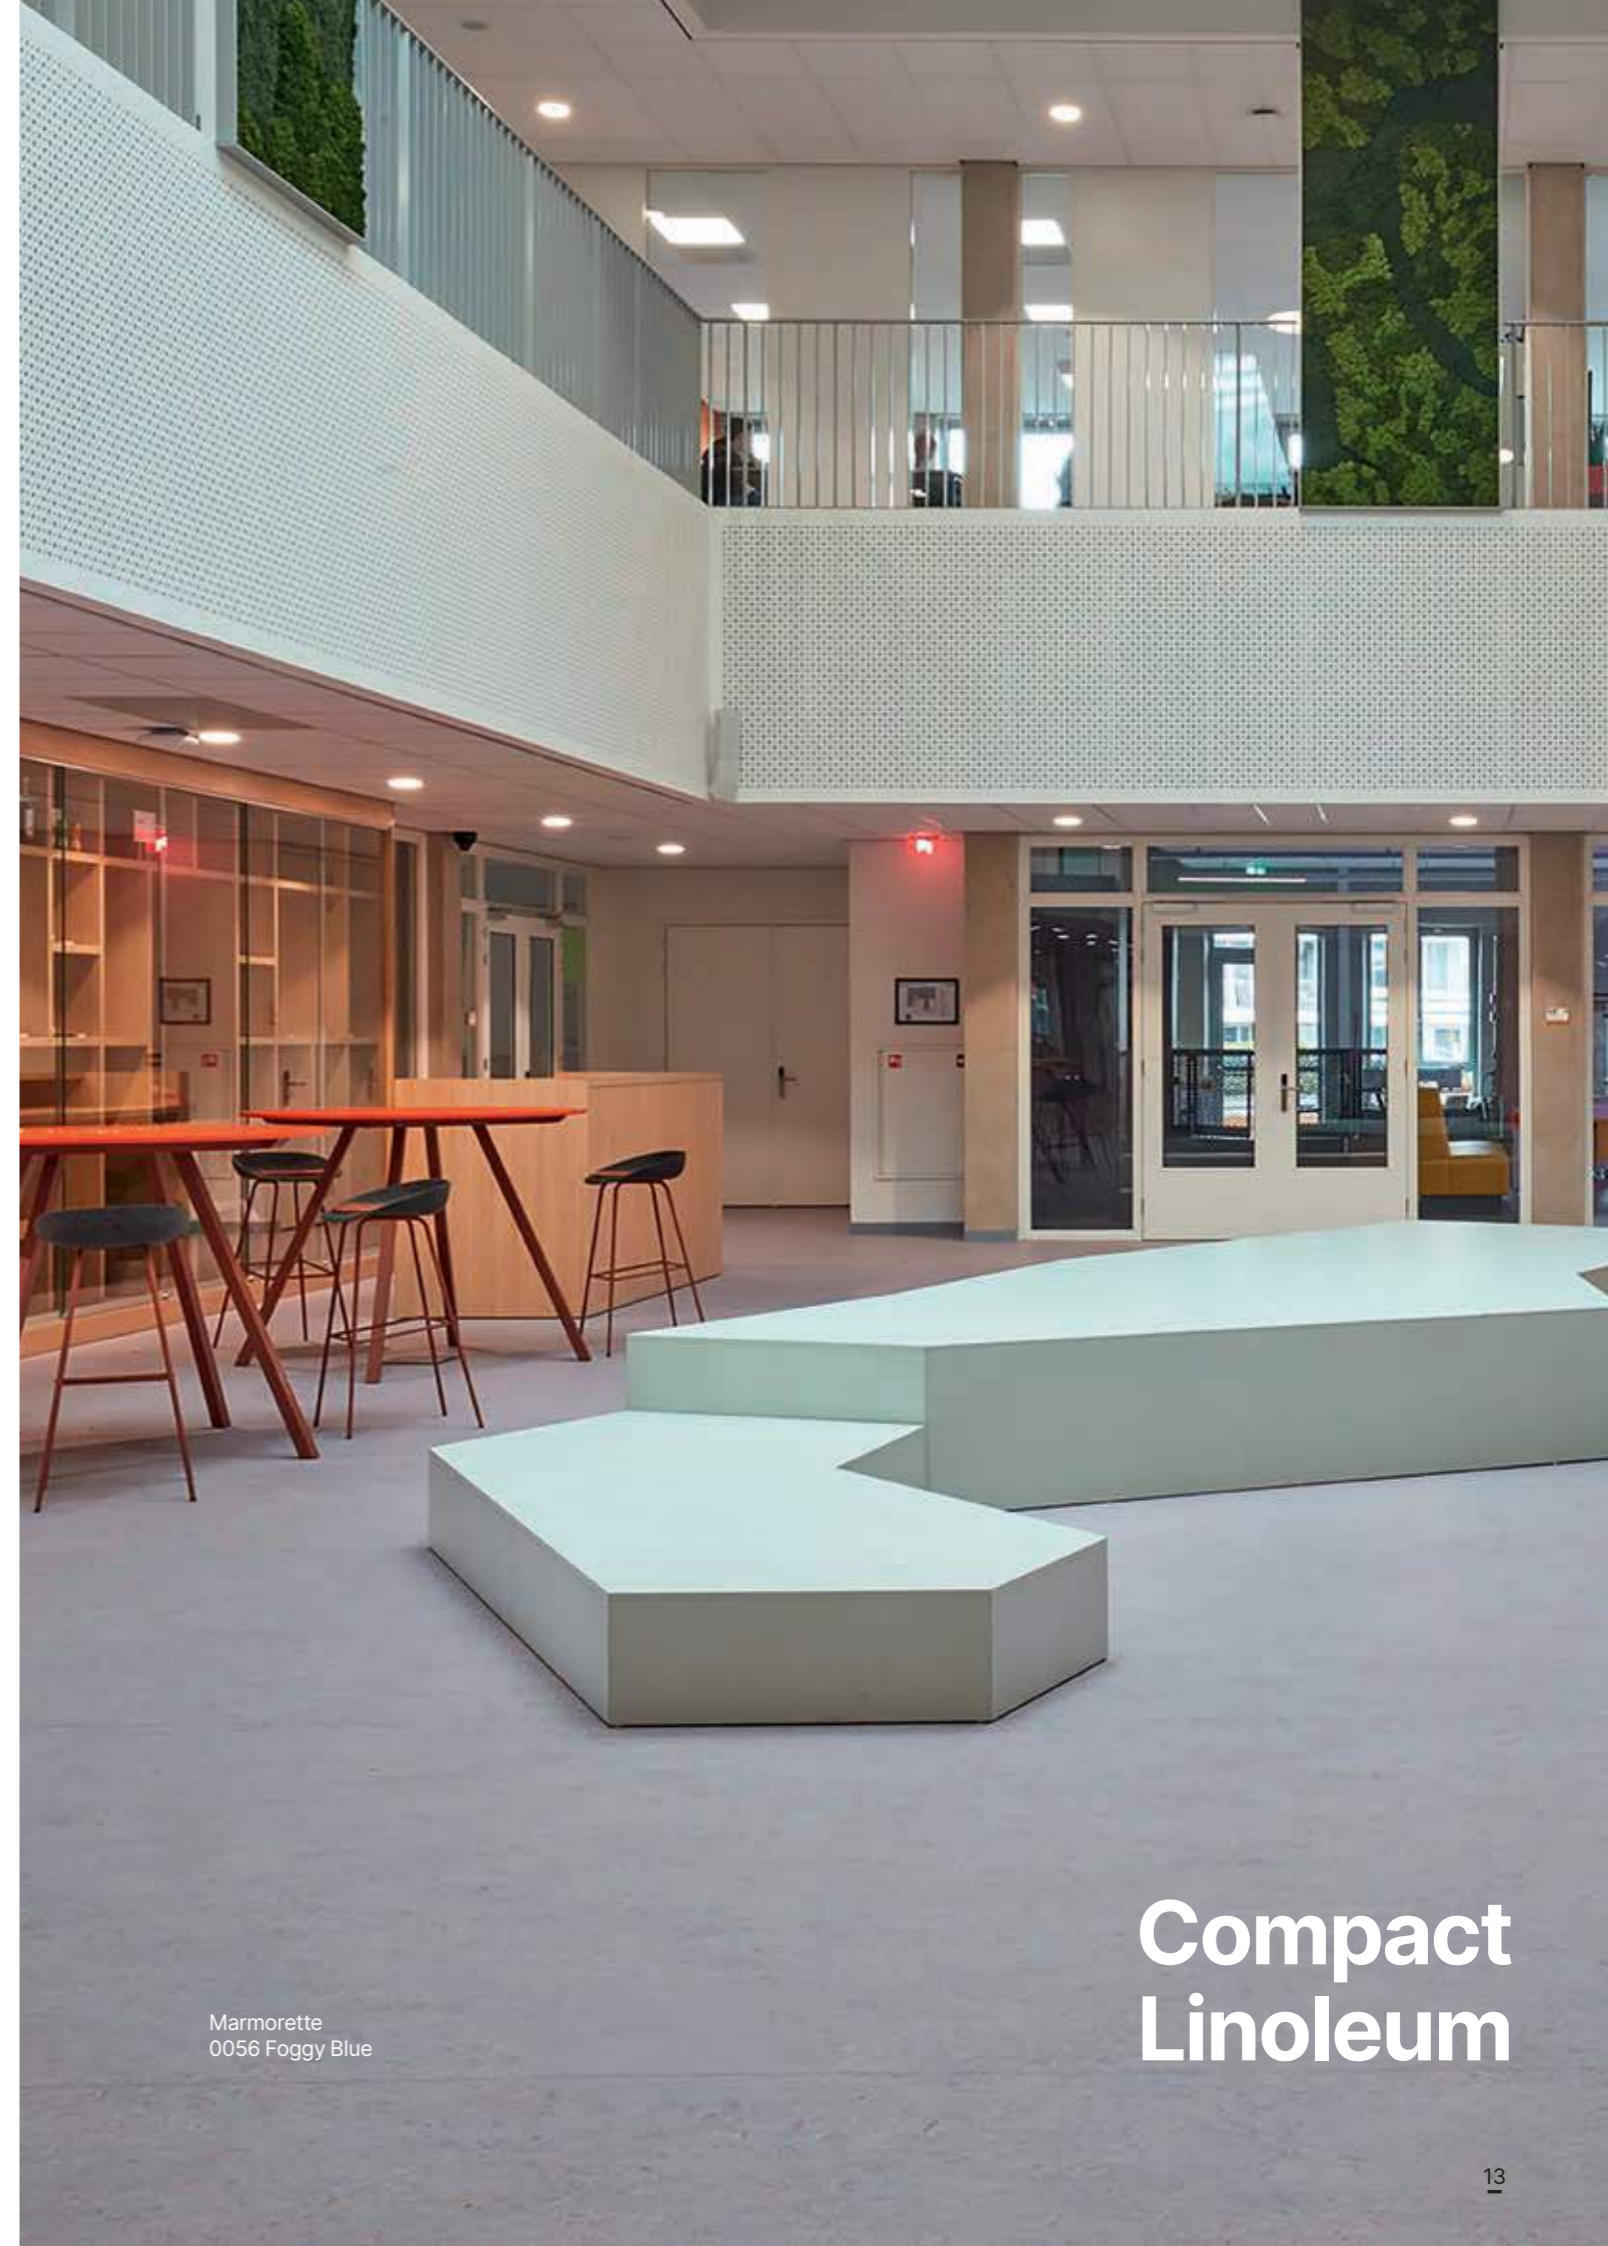

Marmorette  
0056 Foggy Blue

# Compact Linoleum



**0155 Smoked Pearl**  
2.5mm  
NCS: 2005-Y90R / LRV: 44.6




**0056 Foggy Blue**  
2.5mm / 3.2mm  
NCS: 4005-Y50R / LRV: 31.8



**0055 Ash Grey**  
2.0mm / 2.5mm / 3.2mm  
NCS: 3502-B / LRV: 39.0



**0153 Greystone Grey**   
2.5mm  
NCS: 4502-Y / LRV: 29.5



**0053 Ice Grey**    
2.0mm / 2.5mm / 3.2mm  
NCS: 4000-N / LRV: 31.2






**0050 Quartz Grey**  
2.0mm / 2.5mm / 3.2mm  
NCS: 5502-R / LRV: 20.7



**0054 Concrete Patty**  
2.5mm  
NCS: 5500-N / LRV: 20.5



**0059 Plumb Grey**    
2.0mm / 2.5mm / 3.2mm  
NCS: 7005-R50B / LRV: 11.3



**0096 Midnight Grey**   
2.5mm  
NCS: 8000-N / LRV: 7.3



**0252 Light Grey**  
2.5mm  
NCS: 2002-Y / LRV: 49.8



**0254 Mineral Grey**  
2.5mm  
NCS: 3502-Y / LRV: 34.3



**0106 Hazelnut Shake**  
2.5mm  
NCS: 4010-Y50R / LRV: 26.6



**0045 Sand Beige**      
2.0mm / 2.5mm  
NCS: 2005-Y50R / LRV: 53.2



**0146 Beeswax Beige**  
2.5mm  
NCS: 3010-Y50R / LRV: 41.0




**0091 Shiitake Mushroom**  
2.5mm  
NCS: 2010-Y80R / LRV: 41.6



**0166 Clay**  
2.5mm  
NCS: 4005-Y20R / LRV: 28.4



**0003 Dark Brown**  
2.5mm  
NCS: 5010-Y50R / LRV: 23.0





**0090 Soapstone**  
2.5mm  
NCS: 4010-Y70R / LRV: 28.2



**0164 Milk Coffee**  
2.5mm  
NCS: 5010-Y50R / LRV: 18.9



**0158 Tabac Grey**   
2.5mm  
NCS: 6502-R / LRV: 14.8



**0089 Peacan Pie**  
2.5mm  
NCS: 6010-Y70R / LRV: 15.2




**0092 Beach**  
2.5mm  
NCS: 3010-Y30R / LRV: 38.6



**0160 Industrial Grey**  
2.0mm / 2.5mm  
NCS: 7502-R / LRV: 10.3



**0108 Mokka Brown**  
2.5mm  
NCS: 8005-Y80R / LRV: 6.8



**0042 Shortcrust**  
2.5mm  
NCS: 3020-Y30R / LRV: 31.3

 Acoustic 15dB in stock  Acoustic Plus 19dB in stock  R10: in stock  Bfl-s1: in stock

All other colours can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer. All other colours can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm



**0145 Banana White**  
2.5mm  
NCS: 1510-Y30R / LRV: 60.4



**0098 Desert Beige** A  
2.5mm  
NCS: 2020-Y40R / LRV: 49.9



**0072 Golden Yellow**  
2.5mm  
NCS: 2040-Y20R / LRV: 41.0



**0251 Cream**  
2.5mm  
NCS: 1505-Y10R / LRV: 52.9



**0040 Light Sahara** A+  
2.0mm / 2.5mm  
NCS: 1515-Y30R / LRV: 52.7



**0172 Papaya Orange**  
2.5mm  
NCS: 1080-Y20R / LRV: 33.1



**0253 Pebble Grey**  
2.5mm  
NCS: 3005-Y20R / LRV: 44.7



**0040 Light Sahara** A+  
2.0mm / 2.5mm  
NCS: 1515-Y30R / LRV: 52.7



**0173 Melon Orange**  
2.5mm  
NCS: 2040-Y30R / LRV: 38.6



**0243 Marble Beige**  
2.5mm  
NCS: 2010-Y30R / LRV: 48.8



**0076 Pale Yellow**  
2.5mm  
NCS: 2030-Y10R / LRV: 49.6



**0173 Melon Orange**  
2.5mm  
NCS: 2040-Y30R / LRV: 38.6



**0070 Rocky Brown** A+ R10 Bfl  
2.0mm / 2.5mm / 3.2mm  
NCS: 2020-Y40R / LRV: 40.2



**0073 Spicy Orange** A+  
2.5mm  
NCS: 3040-Y50R / LRV: 24.7



**0211 Pink**  
2.5mm  
NCS: 1030-R / LRV: 42.1



**0075 Light Aurora**  
2.5mm  
NCS: 2030-Y60R / LRV: 40.2



**0119 Terracotta**  
2.5mm  
NCS: 3060-Y60 / LRV: 18.1



**0019 Sunset Orange** A  
2.5mm  
NCS: 2040-Y70R / LRV: 27.3



**0117 Mandarin Orange**  
2.5mm  
NCS: 2070-Y60R / LRV: 18.8



**0118 Chili Red**  
2.5mm  
NCS: 2070-Y90R / LRV: 12.5



**0018 Lobster Red**  
2.5mm  
NCS: 3060-R / LRV: 10.6

A Acoustic 15dB in stock A+ Acoustic Plus 19dB in stock R10 R10: in stock Bfl Bfl-s1: in stock


All other colours can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer.  
All other colours can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm



0121 Blue Eyes  
2.5mm  
NCS: 3010-R80B / LRV: 39.0



0122 Fluffy Blue  
2.5mm  
NCS: 4030-B / LRV: 21.6




0026 Sky Blue  
2.5mm  
NCS: 4030-R90B / LRV: 19.7



0130 Antique Green  
2.5mm   
NCS: 2020-G50Y / LRV: 45.5



0023 Dusty Blue      
2.0mm / 2.5mm / 3.2mm  
NCS: 3020-R90B / LRV: 30.0



0049 Royal Blue  
2.5mm / 3.2mm  
NCS: 5020-R70B / LRV: 17.8



0022 Autumn Blue   
2.5mm / 3.2mm  
NCS: 5010-R90B / LRV: 20.6




0099 Grey Turquoise  
2.5mm  
NCS: 4010-B70G / LRV: 27.0




0043 Leaf Green  
2.5mm  
NCS: 3020-G10Y / LRV: 31.6



0224 Mystery Blue  
2.5mm  
NCS: 6020-R90B / LRV: 13.0



0149 Dark Blue  
2.5mm  
NCS: 8010-R70B / LRV: 7.2



0148 Ink Blue  
2.5mm  
NCS: 6020-R70B / LRV: 10.8



0129 Curacao Petrol  
2.5mm  
NCS: 4040-B60G / LRV: 16.8



0132 Lime Green  
2.5mm  
NCS: 2050-G60Y / LRV: 38.1



0100 Frog Green  
2.5mm  
NCS: 3030-G40Y / LRV: 31.4



0128 Violet  
2.5mm  
NCS: 4030-R60B / LRV: 13.8




0028 Dive  
2.5mm  
NCS: 6020-R80B / LRV: 9.4



0136 Turquoise Bay  
2.5mm  
NCS: 6030-B10G / LRV: 9.0



0083 Jungle  
2.5mm  
NCS: 6010-G50Y / LRV: 14.9



0138 Khaki  
2.5mm  
NCS: 5020-G90Y / LRV: 19.9



 Acoustic 15dB in stock  Acoustic Plus 19dB in stock  R10: in stock  Bfi-s1: in stock

All other colours can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer. All other colours can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm



0123 Poppy Blue  
NCS: 1560-R90B / LRV: 21.9



0004 Bluebird  
NCS: 4040-R80B / LRV: 18.6



0132 Spicy Green    
NCS: 1060-G50 / LRV: 44.1



0006 Vivid Green  
NCS: 3040-G20Y / LRV: 24.9




0080 Elephant Grey    
NCS: 6502-B / LRV: 13.5



0058 Aluminium Grey  
NCS: 3502-R / LRV: 36.6




0052 Oxyd Grey    
NCS: 2502-Y / LRV: 47.0

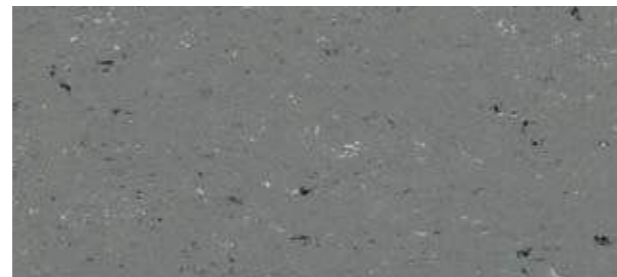

0059 Stone Grey    
NCS: 5500-N / LRV: 22.2



0001 Banana Yellow    
NCS: 1070-Y / LRV: 45.7




0071 Straw Beige  
NCS: 2020-Y30R / LRV: 46.3



0171 Sunrise Orange  
NCS: 1070-Y30R / LRV: 40.7



0073 Sand Yellow  
NCS: 2040-Y30R / LRV: 44.8



0170 Kumquat Orange  
NCS: 1070-Y60R / LRV: 26.9



0016 Deep Orange  
NCS: 2050-Y60R / LRV: 27.7



0118 Power Red  
NCS: 1070-Y90R / LRV: 18.9



0110 Cadillac Pink  
NCS: 2050-R30B / LRV: 23.9



0012 Light Beige    
NCS: 3010-Y20R / LRV: 40.2




0043 Light Mud  
NCS: 5010-Y30R / LRV: 25.6



 Acoustic 15dB in stock  Acoustic Plus 19dB in stock

20 All other colours can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer.  
All other colours can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm




0059 Frost Grey  
NCS: 1502-Y / LRV: 59.6



0095 Spring Blue   
NCS: 3030-B / LRV: 29.1




0081 Nickel Grey  
NCS: 3502-B / LRV: 31.5



0100 Ocean Blue  
NCS: 5040-R80B / LRV: 8.8




0062 Mediterranean Orange  
NCS: 3060-Y60R / LRV: 16.4



0088 Chestnut  
NCS: 5040-Y80R / LRV: 9.1



0043 Neutral Beige  
NCS: 1515-Y30R / LRV: 51.1



0085 Warm Concrete Grey   
NCS: 3005-Y20R / LRV: 35.7



0090 Olive   
NCS: 4020-G90Y / LRV: 22.3



0082 Broken Grey  
NCS: 5502-R / LRV: 20.7



0010 Pompeji Red  
NCS: 2070-Y90R / LRV: 14.1



0060 Deep Brown  
NCS: 7020-Y60R / LRV: 9.2




0058 Clay Grey   
NCS: 6005-Y20R / LRV: 15.8



0035 Racing Green  
NCS: 8005-B80G / LRV: 7.6



0083 Architects Grey   
NCS: 7500-N / LRV: 10.9



0080 Black  
NCS: 8505-R80B / LRV: 4.8

 Acoustic Plus 19dB in stock



0552 Silver Grey  
NCS: 3005-G50Y / LRV: 41.8



0567 Shining Green  
NCS: 4005-G80Y / LRV: 35.2



0566 Shining Blue  
NCS: 5005-R80B / LRV: 21.8



0565 Graphite Grey  
NCS: 6005-R50B / LRV: 15.3



0562 Titan Grey  
NCS: 3000-N / LRV: 41.2



0563 Zinc Grey  
NCS: 4502-R / LRV: 27.4



0555 Flashy Street Grey  
NCS: 4005-Y20R / LRV: 32.1



0550 Beton Soft Grey  
NCS: 4005-Y50R / LRV: 31.7



0556 Mud Grey  
NCS: 3010-Y20R / LRV: 33.7



0557 Urban Grey  
NCS: 4010-Y30R / LRV: 30.5



0558 Screed Grey  
NCS: LRV: 5010-Y10R / 22.8



0564 Natural Stone  
NCS: 1505-Y20R / LRV: 59.1




0554 Concrete Grey  
NCS: 5005-Y50R / LRV: 25.2




0551 Flashy Asphalt Grey  
NCS: 4502-Y / LRV: 24.9




0559 Vintage Grey  
NCS: 5005-Y20R / LRV: 24.9

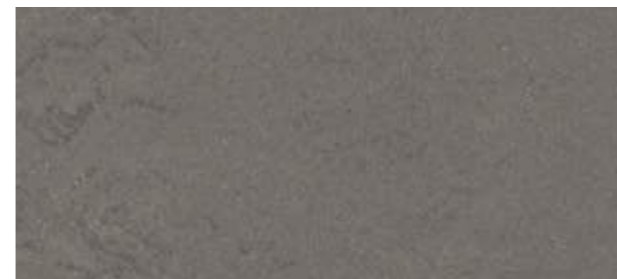

0560 Bold Grey  
NCS: 6005-Y50R / LRV: 16.5

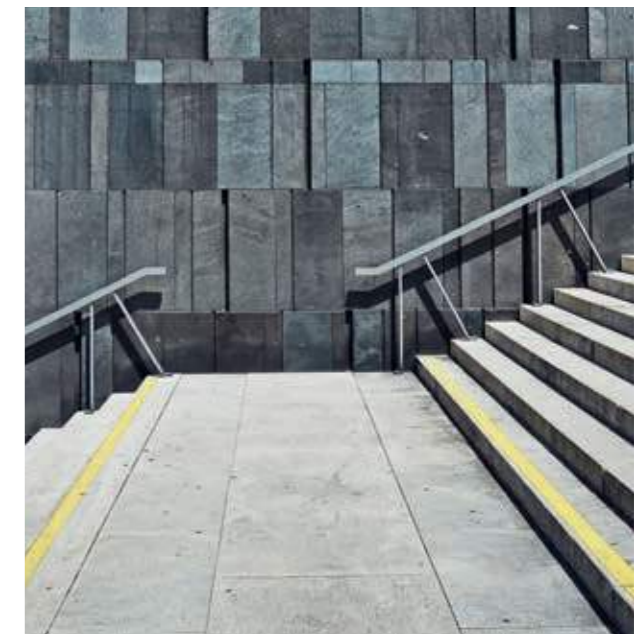

0553 Dark Concrete Grey  
NCS: 6005-Y50R / LRV: 16.1




0561 Pitch Black  
NCS: 8000-N / LRV: 7.1


# Lino Art Metallic



NEOCARE™

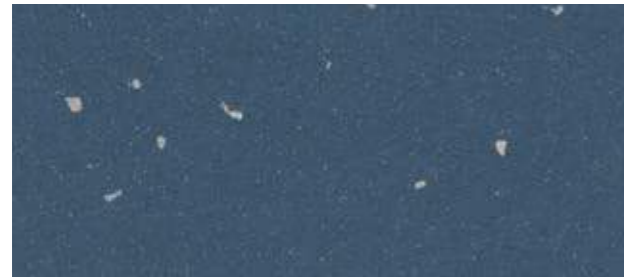


0078 Petrol Blue  
NCS: 7010-R70B / LRV: 11.2

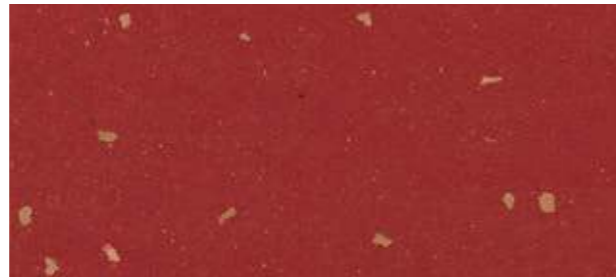


0076 Salsa  
NCS: 4050-Y90R / LRV: 10.0



0070 Cool Grey  
NCS: 7005-B20G / LRV: 11.1



0072 Olive Green  
NCS: 7010-G90Y / LRV: 13.5



0068 Bottle Green  
NCS: 8005-B80G / LRV: 7.2



0083 Alumino Light Grey  
NCS: 7500-N / LRV: 11.0



0080 Firmament Black  
NCS: 8500-N / LRV: 5.0




0074 Burned Siena  
NCS: 8005-Y80R / LRV: 6.7




# Lino Art Star



NEOCARE™



0015 Glaring Red  
NCS: 2070-R / LRV: 11.5

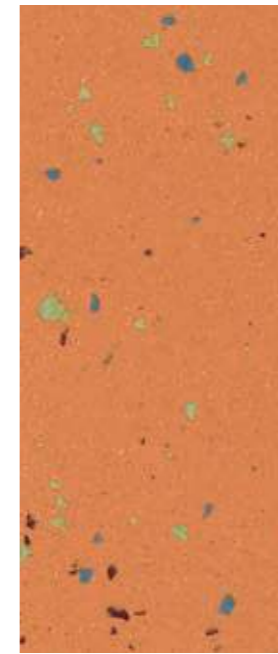

0075 Apricot  
NCS: 2050-Y50R / LRV: 29.0




0092 Stratiatella  
NCS: 4005-Y20R / LRV: 35.4




0090 Smooth Grey  
NCS: 6005-Y50R / LRV: 17.5




0085 Mid Grey  
NCS: 8000-N / LRV: 8.2




0001 Lemon Yellow  
NCS: 1070-Y / LRV: 47.9

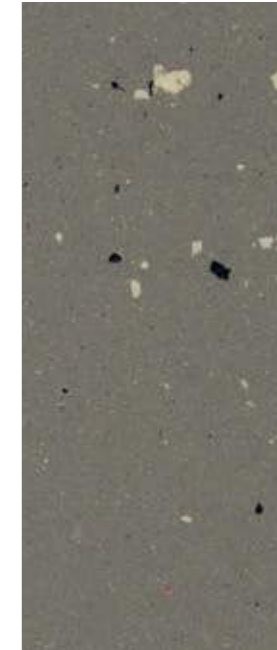


0059 Dusty Grey  
NCS: 5005-Y50R / LRV: 20.9




0030 Apple Green  
NCS: 2050-G40Y / LRV: 35.0




0023 Blue Turquoise  
NCS: 5030-B50G / LRV: 16.0



0020 Aqua Turquoise  
NCS: 2040-B / LRV: 33.9



0025 Clear Blue  
NCS: 5030-R70B / LRV: 13.4



0094 Bubble Gum  
NCS: 1040-R / LRV: 42.5



0024 Magma  
NCS: 2005-Y60R / LRV: 47.8



0012 Waterfall  
NCS: 2002-Y50R / LRV: 50.3



0005 Bamboo  
NCS: 2005-Y20R / LRV: 50.6



0030 Rain  
NCS: 2002-Y50R / LRV: 43.3



0048 Travertin  
NCS: 2010-Y30R / LRV: 55.0



0036 Shaal Concrete  
NCS: 2002-Y50R / LRV: 52.6



0050 Grey Line  
NCS: 5000-N / LRV: 26.0




0043 Pulp Greige  
NCS: 5005-Y50R\* / LRV: 25.4



0083 Light Grey  
NCS: 7500-N / LRV: 10.4



0162 Bark  
NCS: 6010-Y50R / LRV: 16.0

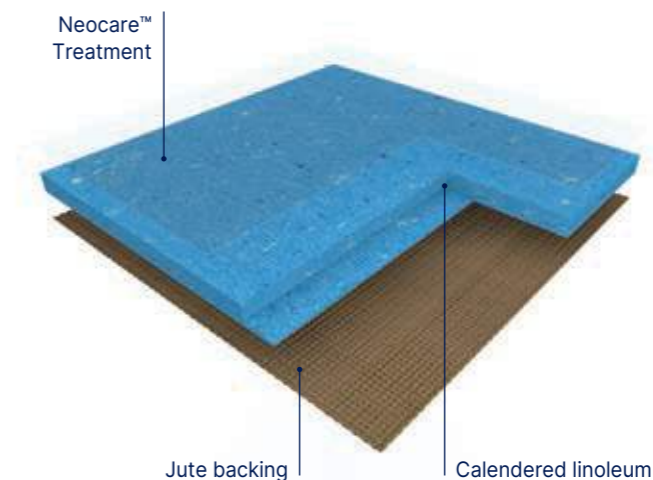

**Colorette** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a speckled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.



**Marmorette** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2400g/sqm in 2.0mm, 2900g/sqm in 2.5mm and 3800g/sqm in 3.2mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.



**Uni Walton** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a uni design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.



**Lino Art** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a striated design (FLOW), a scattered metallic design (METALLIC), a scattered colour chips design (STAR), a concrete design (URBAN) and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

### Colorette, Marmorette, Uni Walton, Lino Art

The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.

The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m<sup>3</sup>) and are classified A + (the best class) in the context of health labeling. It is Floorscore®, M1 and Blue Angel certified.






The floorings are 100% recyclable, are composed of up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance.

Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Silver. They are Environmental Performance Declaration (EPD) certified by an external laboratory indicating carbon neutrality during the first stages of their life cycle ("from cradle to gate").

The Camouflage (Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible.

They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.


# Compact Linoleum NEOCARE™

Description			Marmorette		Colorette / Uni Walton		Lino Art Urban / Flow / Metallic / Star
			R10*	Bfl-s1*			
Total thickness	EN ISO 24346	mm	2.0 / 2.5 / 3.2	2.5	2.5	2.5	2.5
Backing	-	-	Jute fabric		Jute fabric	Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	2400 / 2900 / 3800	2900	2900	2900	2900
Width of sheet	EN ISO 24341	cm	200		200	200	200
Length of sheet	EN ISO 24341	m	20-31		20-31	20-31	20-31
<b>Classification</b>							
Norm/Product specification	-	-	EN ISO 24011		EN ISO 24011	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43		23 / 34 / 43	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	Cfl-s1**	Bfl-s1*	Cfl-s1**	Cfl-s1**	Cfl-s1**
Slip resistance	EN 16165 App B (DIN 51130)	class	R9	R10*	R9	R9	R9
Impact sound insulation	EN ISO 717-2	dB	3dB / 5dB / 6dB	5dB	5dB	5dB	5dB
<b>Performances</b>							
Residual indentation	EN ISO 24343-1	mm	≤ 0.09 / ≤ 0.11	≤ 0.11	≤ 0.11	≤ 0.11	≤ 0.11
Colour fastness	EN ISO 105 - B02	Rating	≥ 6		≥ 6	≥ 6	≥ 6
Point contact resistance	VDE 0100	kOhm	> 200		> 200	> 200	> 200
Static electrical propensity	EN 1815	kV	≤ 2		≤ 2	≤ 2	≤ 2
Castor chair test (Type W)	ISO 4918	-	OK		OK	OK	OK
Flexibility	ISO 24344	mm	Ø 40 (2.5 mm)		Ø 40	Ø 40	Ø 40
Flexibility (average measured value)	ISO 24344	mm	Ø 30		Ø 30	Ø 30	Ø 30
Thermal resistance	EN 12667	sqm,K/W	0.012 / 0.015 / 0.018	0.015	0.015	0.015	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17		0.17	0.17	0.17
Surface treatment	-	-	Neocare™		Neocare™	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	-	Excellent		Excellent	Excellent	Excellent
Anti-bacterial activity (E. coli - S. aureus - MRSA) after 24 h***	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth		> 99.99% inhibits growth	> 99.99% inhibits growth	> 99.99% inhibits growth
Anti-viral activity (Human coronavirus) after 5 h***	ISO 21702	-	> 98.65% virucidal activity		> 98.65% virucidal activity	> 98.65% virucidal activity	> 98.65% virucidal activity
<b>Indoor Air Quality</b>							
TVOC after 28 days	EN 16516	microgram/m³	< 10		< 10	< 10	< 10
<b>Circular economy</b>							
Certification	Cradle to Cradle	-	Silver	Silver	-	Silver	Silver
<b>CE marking</b>							
	EN 14041: 2004 AC: 2006	-					

\* Only in colours: 0053 / 0059 / 0045 / 0070 / 0023

\*\* Glued according to certificate. / DOP numbers available from your local branch.

\*\*\* The implementation of an effective cleaning method is the best defence against infection.

 Depending on light exposure, the product colour can vary due to the natural oxidation process of linoleum. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

Colorette  
0171 Sunrise Orange

# Acoustic Linoleum

## Marmorette Acoustic



0059 Plumb Grey  
NCS: 7005-R50B / LRV: 11.3



0053 Ice Grey  
NCS: 4000-N / LRV: 31.2



0098 Desert Beige  
NCS: 2020-Y40R / LRV: 49.9



0045 Sand Beige  
NCS: 2005-Y50R / LRV: 53.2



0023 Dusty Blue  
NCS: 3020-R90B / LRV: 30.0



0019 Sunset Orange  
NCS: 2040-Y70R / LRV: 27.3

## Marmorette Acoustic Plus



0096 Midnight Grey  
NCS: 8000-N / LRV: 7.3



0059 Plumb Grey  
NCS: 7005-R50B / LRV: 11.3



0158 Tabac Grey  
NCS: 6502-R / LRV: 14.8




0053 Ice Grey  
NCS: 4000-N / LRV: 31.2



0153 Greystone Grey  
NCS: 4502-Y / LRV: 29.5



0070 Rocky Brown  
NCS: 2020-Y40R / LRV: 40.2



0040 Light Sahara  
NCS: 1515-Y30R / LRV: 52.7



0045 Sand Beige  
NCS: 2005-Y50R / LRV: 53.2



0022 Autumn Blue  
NCS: 5010-R90B / LRV: 20.6



0023 Dusty Blue  
NCS: 3020-R90B / LRV: 30.0



0130 Antique Green  
NCS: 2020-G50Y / LRV: 45.5



0073 Spicy Orange  
NCS: 3040-Y50R / LRV: 24.7


## Colorette Acoustic Plus



0080 Elephant Grey  
NCS: 6502-B / LRV: 13.5



0059 Stone Grey  
NCS: 5500-N / LRV: 22.2



0052 Oxid Grey  
NCS: 2502-Y / LRV: 47.0



0012 Light Beige  
NCS: 3010-Y20R / LRV: 40.2



0001 Banana Yellow  
NCS: 1070-Y / LRV: 45.7



0132 Spicy Green  
NCS: 1060-G50 / LRV: 44.1

## Uni Walton Acoustic Plus



0083 Architects Grey  
NCS: 7500-N / LRV: 10.9



0058 Clay Grey  
NCS: 6005-Y20R / LRV: 15.8



0085 Warm Concrete Grey  
NCS: 3005-Y20R / LRV: 35.7



0095 Spring Blue  
NCS: 3030-B / LRV: 29.1



0090 Olive  
NCS: 4020-G90Y / LRV: 22.3



0010 Pompeji Red  
NCS: 2070-Y90R / LRV: 14.1

## Lino Art Urban Acoustic Plus



0561 Pitch Black  
NCS: 8000-N / LRV: 7.1



0553 Dark Concrete Grey  
NCS: 6005-Y50R / LRV: 16.1




0554 Concrete Grey  
NCS: 5005-Y50R / LRV: 25.2



0558 Screed Grey  
NCS: LRV: 5010-Y10R / 22.8




0556 Mud Grey  
NCS: 3010-Y20R / LRV: 33.7



0564 Natural Stone  
NCS: 1505-Y20R / LRV: 59.1

All other colors can be manufactured in Acoustic 15dB version. Special request - Minimum order quantity: 1500sqm. Below 1500sqm, use Korkment underlayer.  
All other colors can be manufactured in Acoustic Plus 19dB version. Special request - Minimum order quantity: 58sqm

# Acoustic Linoleum NEOCARE™

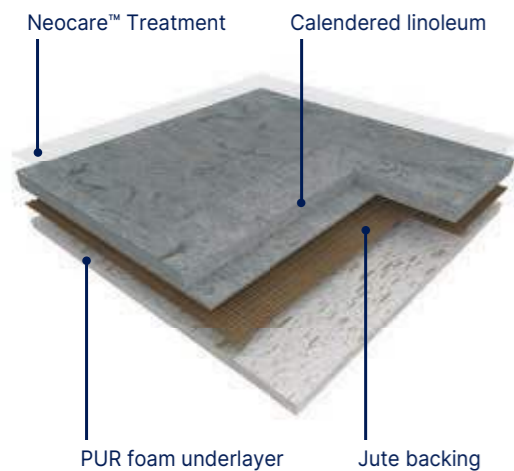


**Marmorette Acoustic Plus** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1.5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

**Colorette Acoustic Plus** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a speckled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1.5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

**Uni walton Acoustic Plus** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a uni design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1.5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

**Lino Art Urban Acoustic Plus** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a concrete design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 1.5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

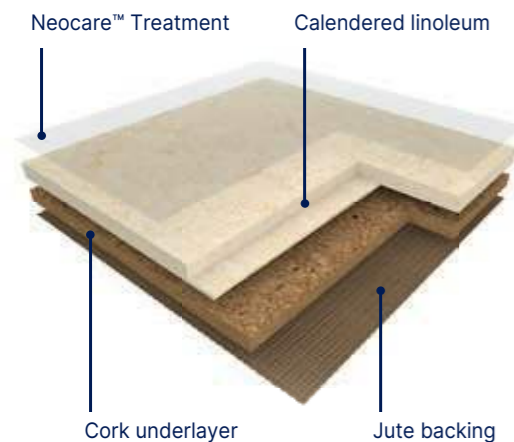

**Marmorette Acoustic** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3900g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 2mm cork underlayer, ensuring up to 15dB impact sound reduction.

## Acoustic Linoleum

The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.

The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m<sup>3</sup>) and are classified A + (the best class) in the context of health labeling. They are Floorscore®, M1 and Blue Angel certified. The floorings are 100% recyclable, are composed of up to 44% recycled content (Acoustic Plus), 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance.

Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Bronze (Marmorette Acoustic Plus, Colorette Acoustic Plus) and Cradle to Cradle certified™ Silver (Marmorette Acoustic). Their Environmental Performance Declaration (EPD) certified by an external laboratory, indicate carbon neutrality during the first stages of their life cycle ("from cradle to gate").

The Camouflage (Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible. They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.



### Korkment: cork acoustic underlayer

2.0mm underlayer (weight 1.2kg/sqm), 15 dB impact sound reduction

Ref R1020102

**Marmorette Acoustic Plus 19db**  
**Colorette Acoustic Plus 19db**  
**Uni Walton Acoustic Plus 19db**  
**Lino Art Urban Acoustic Plus 19db**

**Marmorette Acoustic 15db**

## DESCRIPTION

Total thickness	EN ISO 24346	mm	4.0	4.0
Backing	-	-	Foam backing	Cork and jute fabric
Thickness of cork / foam backing	EN ISO 24340	mm	1.5	2.0
Weight	EN ISO 23997	g/sqm	3500	3900
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	m	20-31***	20-31

## CLASSIFICATION

Norm / Product specification	-	-	EN 686	EN 687
European classification	EN ISO 10874	class	23 / 33 / 41	23 / 33 / 41
Fire rating	EN 13501-1	class	Cfl-s1*	Cfl-s1*
Slip resistance	EN 16165 App B (DIN 51130)	class	R9	R9
Impact sound insulation	EN ISO 717-2	dB	19dB	15dB

## PERFORMANCES

Residual indentation	EN ISO 24343-1	mm	≤ 0.30	≤ 0.40
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6
Point contact resistance	VDE 0100	kOhm	> 200	> 200
Static electrical propensity	EN 1815	kV	≤ 2	≤ 2
Castor chair test (Type W)	ISO 4918	-	OK	OK
Flexibility	ISO 24344	mm	Ø 40	Ø 60
Flexibility (Average measured value)	ISO 24344	mm	Ø 35	Ø 30
Thermal resistance	EN 12667	sqm,K/W	0.044	0.04
Thermal conductivity	EN ISO 10456	W/(m.K)	0.0937	0.17
Surface treatment	-	-	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	class	Excellent	
Anti-bacterial activity (E. coli - S. aureus - MRSA)** after 24 hours	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth	> 99.99% inhibits growth
Anti-viral activity (Human coronavirus) after 5h*	ISO 21702	-	> 98.65% virucidal activity	> 98.65% virucidal activity

## INDOOR AIR QUALITY

TVOC after 28 days	EN 16516	microgram/m <sup>3</sup>	< 10	< 10
--------------------	----------	--------------------------	------	------

## CIRCULAR ECONOMY

Certification	Cradle to Cradle	-	Bronze	Silver
---------------	------------------	---	--------	--------

## CE MARKING

CE	EN 14041: 2004 AC: 2006	-	
----	----------------------------	---	--

\* Glued according to certificate.

\*\* The implementation of an effective cleaning method is the best defense against infection.

\*\*\* Roll dimension 1.96m x 18-291m for single roll production

DOP numbers available from your local branch.

⚠ Depending on light exposure, the product colour can vary due to the natural oxidation process of linoleum. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.



# Technic Linoleum

Linodur  
1020 Spring Blue

## Linodur


High mechanical traffic resistance



1056 Marble Grey  
NCS: 4000N / LRV: 35.2



1020 Spring Blue  
NCS: 4020-R90B / LRV: 24.1

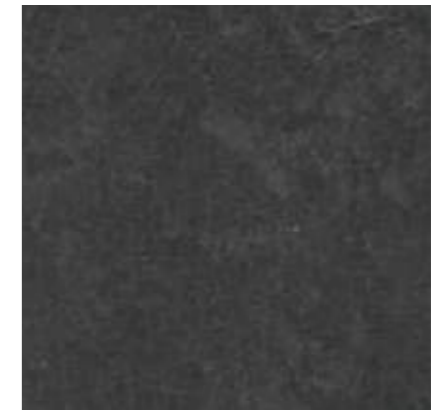

1081 Sporty Black  
NCS: 7502-B / LRV: 6.7



1024 Speckled Blue  
NCS: 4030-R80B / LRV: 15.2



1072 Peach Orange  
NCS: 2050-Y40R / LRV: 30.1



1011 Avocado Green  
NCS: 2050-G30Y / LRV: 29.2

## Marmorette LCH $10^6 \leq R \leq 10^8$

Dissipative Linoleum for ESD areas




0023 Dusty Blue  
NCS: 3020-R90B / LRV: 30.0



0055 Ash Grey  
NCS: 3502-B / LRV: 39.0

# Linodur Technic Linoleum

High mechanical traffic resistance

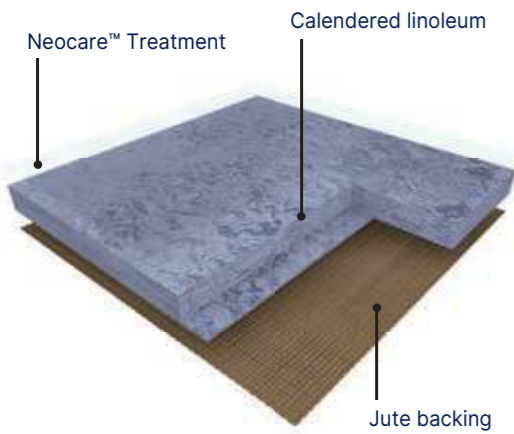

**Linodur** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high pedestrian and mechanical traffic areas.

Its weight is 4700g/sqm in 4.0mm.

It features a discreet grain design and is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring.

This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.

The Camouflage welding rod makes the connections between the strips invisible.

It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

The flooring is 100% recyclable, is composed of up to 32% recycled content, 100% controlled, is REACH compliant and rated CfI-s1 for fire resistance.


It is designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications.

The Camouflage welding rod makes the connections between the strips invisible.

It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

# Marmorette LCH

Dissipative Linoleum for ESD areas

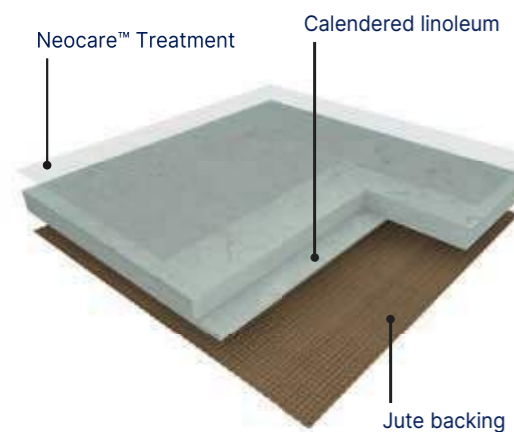

**Marmorette LCH** is a calendered linoleum compact dissipative floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas.

Its vertical resistance is  $10^6 < R < 10^8 \Omega$ .

Its weight is 3000g/sqm in 2.5mm.

It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring.

This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The flooring is 100% recyclable, is composed of up to 40% recycled content, 100% controlled, is REACH compliant and rated CfI-s1 for fire resistance.

It is designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications.

The Camouflage welding rod makes the connections between the strips invisible.

It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

Linodur

Marmorette LCH

## DESCRIPTION

			Linodur	Marmorette LCH
Total thickness	EN ISO 24346	mm	4.0	2.5
Backing	-	-	Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	4700	3000
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	m	App.28	20-31

## CLASSIFICATION

			Linodur	Marmorette LCH
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	Cfl-s1*	Cfl-s1*
Slip resistance	EN 16165 App B (DIN 51130)	class	R10	R9
Impact sound insulation	EN ISO 717-2	dB	8dB	3dB

## PERFORMANCES

			Linodur	Marmorette LCH
Residual indentation	EN ISO 24343-1	mm	≤ 0.20	≤ 0.15
Colour fastness	EN ISO 105 - B02	degree	≥ 6	≥ 6
Vertical resistance	EN 1081	Ohm	-	$10^6 \leq R \leq 10^8$
Static electrical propensity	EN 1815	kV	≤ 2	≤ 2
Castor chair test (Type W)	ISO 4918	-	OK	OK
Thermal resistance	EN 12667	sqm,K/W	0.023	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17	0.17
Surface treatment	-	-	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	class	Excellent	
Anti-bacterial activity (E. coli - S. aureus - MRSA)** after 24 hours	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth	> 99.99% inhibits growth
Anti-viral activity (Human coronavirus) after 5h*	ISO 21702	-	>98,65 % virucidal activity	> 98.65 % virucidal activity

## INDOOR AIR QUALITY

			Linodur	Marmorette LCH
TVOC after 28 days	EN 16516	microgram/m <sup>3</sup>	<50	< 10

## CE MARKING

CE	EN 14041: 2004 AC: 2006	-	
----	----------------------------	---	--

\* Glued according to certificate.

\*\* The implementation of an effective cleaning method is the best defense against infection.

DOP numbers available from your local branch.

Depending on light exposure, the product colour can vary due to the natural oxidation process of linoleum. This process is reversible. We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.

# More than a floor... wall & finishes

For more details visit [gerflor.com](http://gerflor.com)



## Floor protection



REF.: 058X0001

## Korkment: cork acoustic underlayer



REF.: R1020102


2MM

## Welding rod



Welding rod matching table available on: [gerflor.com](http://gerflor.com)

## Skirtings MDF

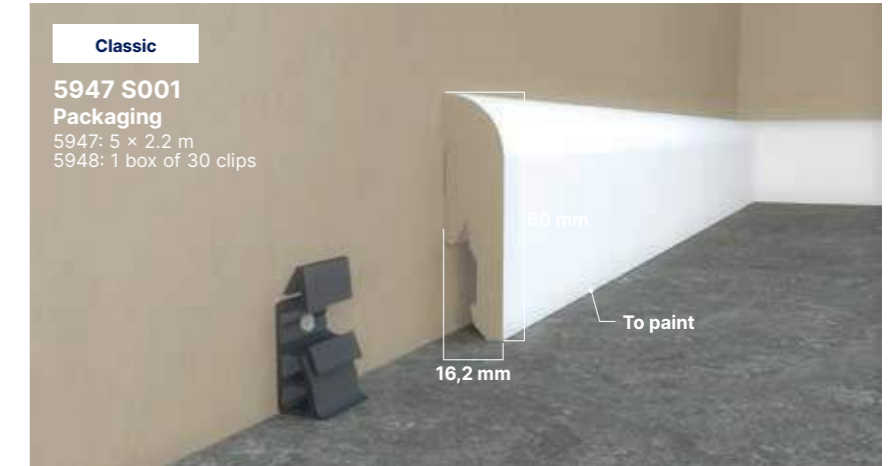

Color: White

## Skirtings cove former




Color: 6512

## Skirtings HSLA



# Cleaning Neocare™- treated Linoleum floors


## Marmorette / Colorette Uni Walton / Lino Art / Linodur















 **Damp sweeping equipment**  
Flexible mop preferably fitted with disposable, antistatic and/or pre-impregnated gauze strips

 **Manual washing equipment**  
Disposable microfibre mop or gauze

 **Single disk machine**

 **Autoscrubber**

 **Mechanical cleaning disk**  
3M (or equivalent) colour disks

	Equipment used	Cleaning products	Cleaning methods
<b>First use</b>			
<b>Manual or mechanical cleaning</b>	    or  if soiled	Neutral detergent or Alkaline detergent	<ul style="list-style-type: none"> <li>• Damp sweeping</li> <li>• Mechanical washing at 160-200 rpm (with water recovery)</li> </ul>
<b>Daily cleaning</b>			
<b>Manual cleaning</b>	 	Neutral detergent / Disinfectant detergent <sup>(1)</sup>	<ul style="list-style-type: none"> <li>• Damp sweeping</li> <li>• Manual washing with flat mop</li> <li>• Rinsing</li> </ul>
<b>OR</b>			
<b>Mechanical cleaning</b>	  	Neutral detergent	<ul style="list-style-type: none"> <li>• Damp sweeping</li> <li>• Mechanical washing at 160-200 rpm (with water recovery)</li> </ul>
<b>Deep cleaning</b>			
<b>Mechanical cleaning</b>	   or 	Alkaline detergent	<ul style="list-style-type: none"> <li>• Damp sweeping</li> <li>• Mechanical washing at 160-200 rpm (with water recovery)</li> </ul>

(1) In areas where disinfection is essential (e.g. operating theatres, hospital rooms, etc.), alternate between using neutral detergent and amine-free disinfectant detergent.

These cleaning instructions have to be adapted depending on traffic and location of the area.

In the case of **manual maintenance** and to offer you the best results in terms of hygiene and appearance, **Gerflor recommends that you use neutral and alkaline detergents with high wetting power** (complete spreading and cleaning of the entire floor surface).



**Installation & maintenance guidelines available on**



Gerflor DLW flooring products are to be installed in full accordance with Gerflor DLW installation instructions and recognized trade standards.

An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Gerflor DLW flooring products should only be used as floorcoverings.

Note: Gerflor DLW reserve the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, check our website: [www.gerflor.com](http://www.gerflor.com)



Uni Walton  
0100 Ocean Blue

Lino Art Flow  
0030 Rain



Lino Art Urban  
0566 Shining Blue



Uni Walton  
0100 Ocean Blue



Lino Art Flow  
0030 Rain

### Visualize your project

[interiordesigner.gerflor.com](http://interiordesigner.gerflor.com)



# Mix & Match

Lino Art Urban  
0555 Flashy Street Grey



Lino Art Flow  
0024 Magma



Marmorette  
0117 Mandarin Orange

# The proof is in the customer experience



University of Praha,  
Czech Republic



Oncology Center,  
Moscow, Russia



Language School  
Underhub,  
Kiev, Ukraine



National Stadium,  
Beijing, China



Glasgow Royal  
Infirmary,  
United Kingdom




Kindergarden,  
Terenten, Italy

## Testimonial:

"After trying DLW linoleum equipped with Neocare™, I would definitely recommend it for healthcare projects, as it meets our demanding standards in terms of cleaning and hygiene."

Anita Heidelberg, Head of Cleaning and Disinfection,  
Glostrup Hospital, Denmark

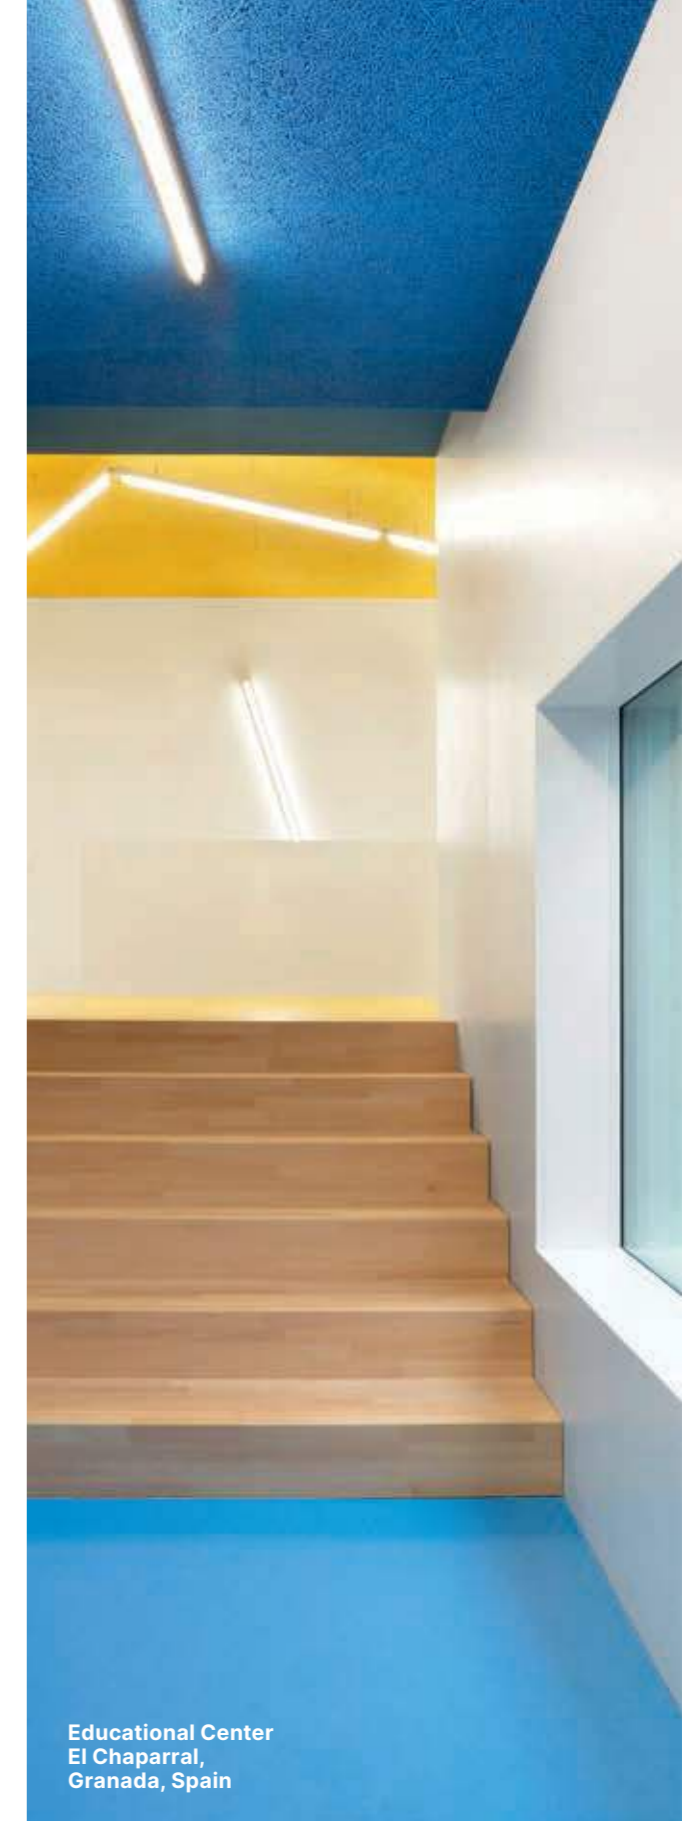

Educational Center  
El Chaparral,  
Granada, Spain



## DLW Linoleum, Creative by Nature

**At Gerflor**, we believe that architecture has the power to improve people's lives. Nature is our greatest source of inspiration. With the DLW Linoleum offer, we can provide architects with a collection of 159 colors, these are natural designs, that can enhance the sustainability and the creativity of their projects.


Made in Germany since 1882 and Cradle to Cradle certified™ Silver, the DLW Linoleum products are made of 98% natural materials including linseed oil, wood, limestone, jute and resin. It's simply our way of connecting people closer to nature.

# Mix & Match Collections



**DLW Linoleum**  
Creative by Nature 



**DLW Lino Art**  
Creative by Nature 

## we care / we act Our Commitments for a Sustainable future

  
**CARBON FOOTPRINT\***  
-20 % kg CO<sub>2</sub> equivalent/m<sup>2</sup> between 2020 and 2025

  
**BIOSOURCED CONTENT\*\***  
10 % by 2025

  
**RECYCLED CONTENT**  
30 % by 2025

  
**ADHESIVE FREE\*\*\***  
35 % by 2025

  
**ANNUAL VOLUME RECYCLED**  
60 000 t by 2025



\* Scopes 1 and 2 defined in the GHG protocol \*\* % of activity with biosourced materials \*\*\* % of activity - adhesive free solution