




# THE RELIEF SOLACE



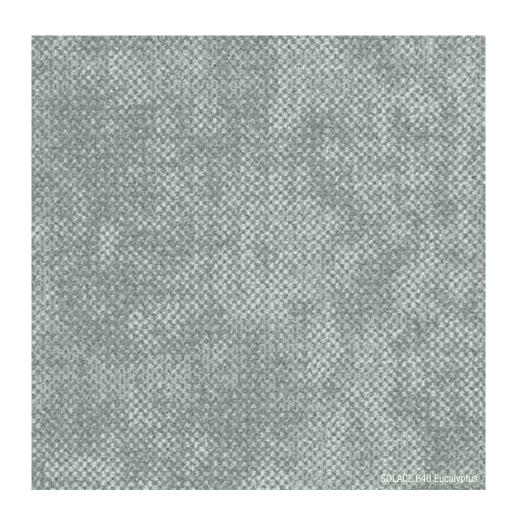

Inspiration is everywhere

### Subtle touch of nature

SOLACE, part of The Relief Collection, reflects both the energy and tranquillity of nature. It captures the intensity and variety of the natural elements, in an irregular pattern that adds a raw, natural look to your spaces.

It brings subtle natural tones to life, reminiscent of a walk through the forest or a hike along the rugged cliffs on the coastline. The effect is like a good walk should be: letting you explore and relax at the same time.






### Serene colour range

SOLACE comes in 11 subtle colour tones straight from nature. Be inspired by the vastness of a mountain face, the calmness of a beige beach, the warmth of rusty metal, ... The serene shades derive their names directly from nature. Our solution dyed yarns are coloured to the core and tufted in a textured pattern, for a beautiful loop pile effect that combines amazingly with harsher natural materials such as concrete or steel.





SOLACE 165 OFF WHITE




SOLACE 170 LIGHT TAUPE





SOLACE 240 INDIAN SUMMER




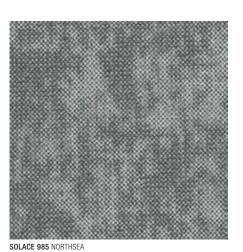


SOLACE 975 PEPPERWHITE










SOLACE 995 CARBON


SOLACE 990 GRANITE

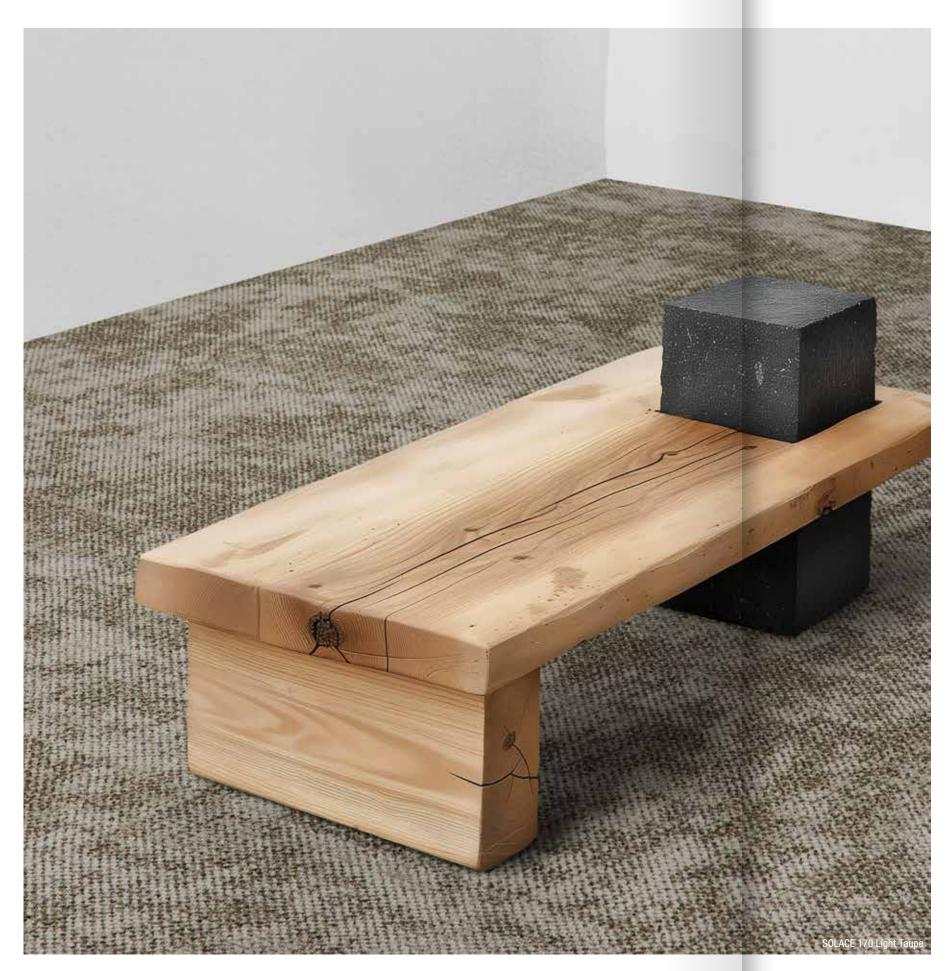




## Serenity at the office

The organic design and intricate texture of SOLACE create a sense of calm. In combination with its excellent sound-absorbing properties and wonderful walking comfort, it is the perfect carpet tile for an office environment, allowing you to focus with an energising touch of nature underfoot.

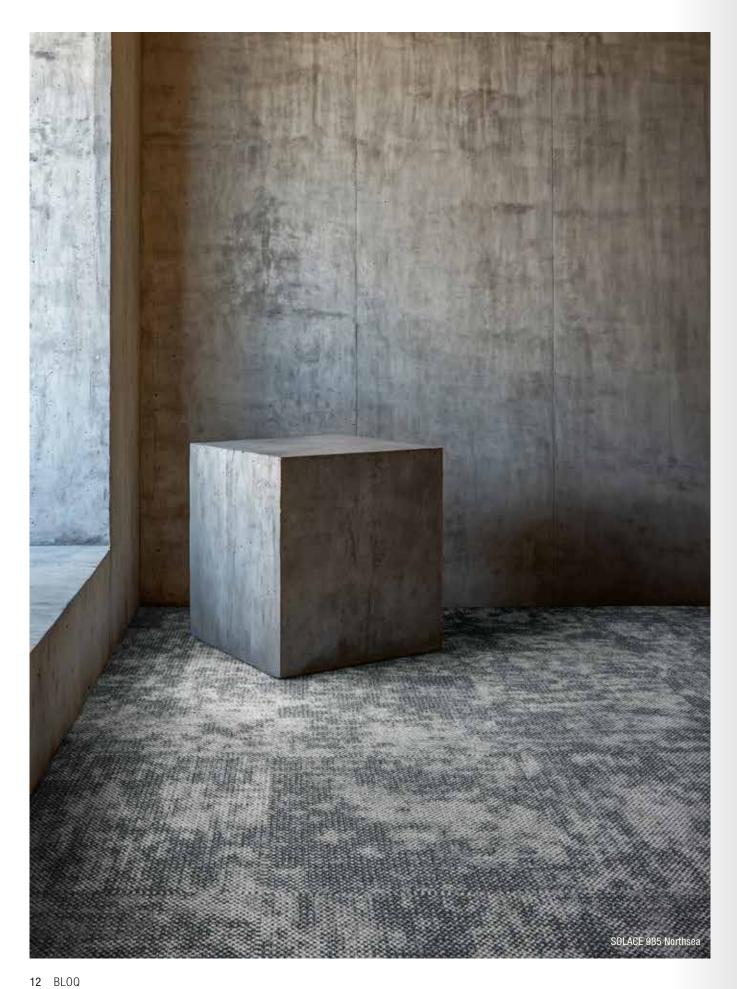

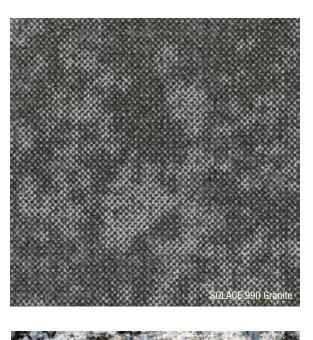








Experience the hues of nature

SOLACE 13

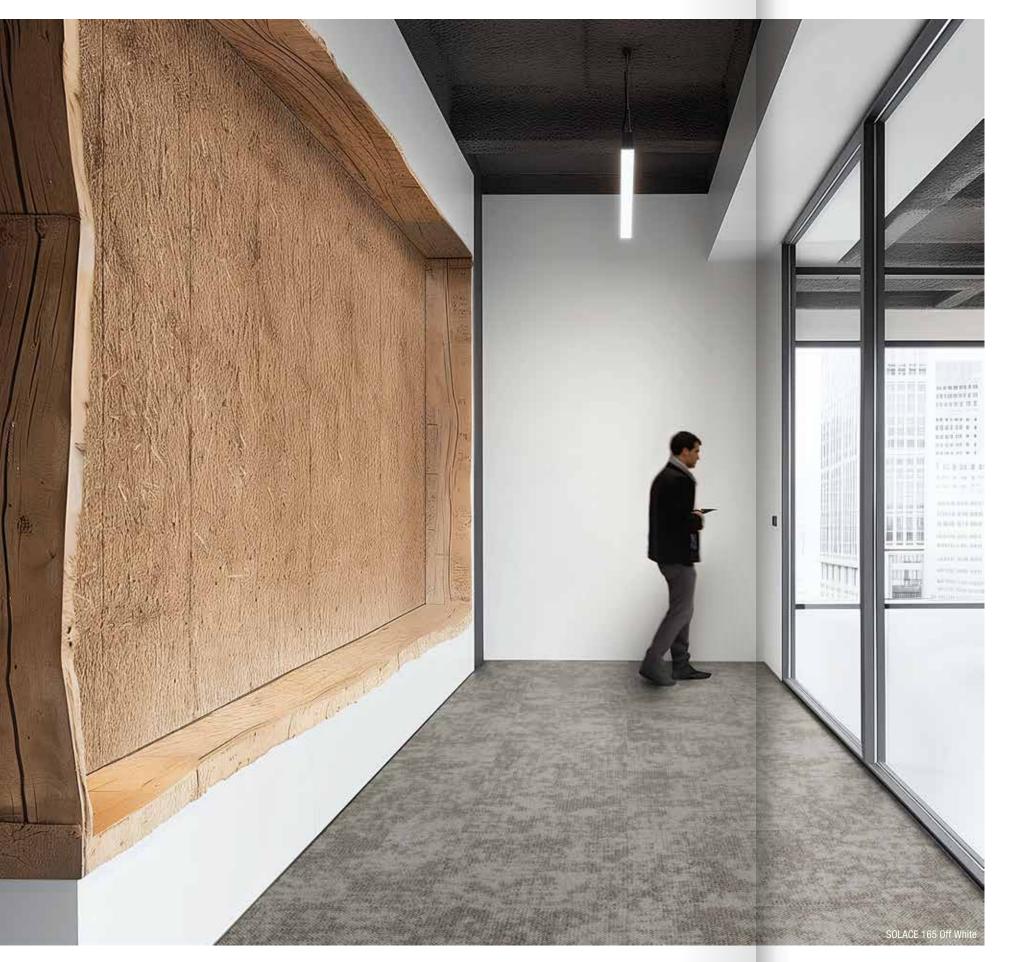



### Don't be afraid to mix

Just as the elements in nature can collide, you can easily combine different shades of SOLACE. Combine complementary hues, such as green Fern with warm Indian Summer, or mimic natural scenes by creating a transition from Off white to the slightly darker Driftwood. This way, you can subtly mark out areas in your space or make the scene look and feel more dynamic.








SOLACE 830 DRIFTWOOD

SOLACE 165 OFF WHITE




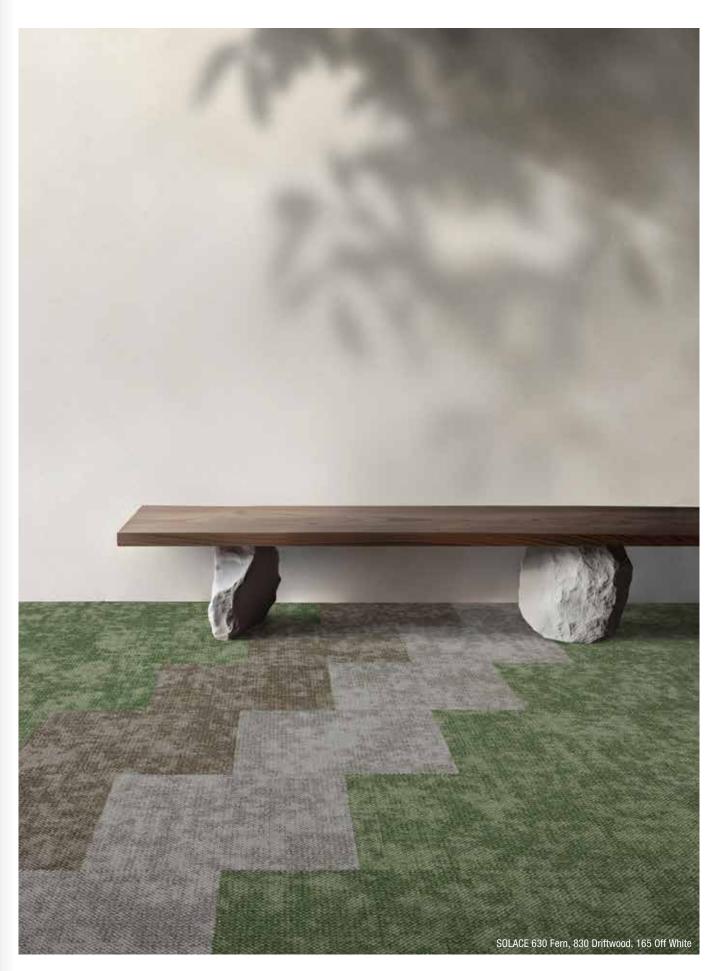



Combine similar shades for a subtle colour transition that exudes balance.

000








SOLACE 640 EUCALYPTUS SOL

SOLACE 170 LIGHT TALIP









### Highlights

#### NON-DIRECTIONAL POSITIONING

SOLACE carpet tiles are most beautiful when installed non-directional. By placing the tiles in varying directions, you get less repetition in the pattern, giving your SOLACE floor an even more natural look. On the back of each tile, you will find an arrow indicating the pile direction, making nondirectional installation easier.

<b>→</b>	1	<b>←</b>	<b>\</b>
+	<b>→</b>	1	<b>♦</b>



#### LIGHT REFLECTANCE VALUES

**Light Reflectance Value** (LRV) is a scale that measures visible and usable light reflected from an illuminated surface. The percentage identifies how much light a colour reflects or absorbs. 0% reflects no visible light, 100% reflects all light.

COLOUR	LRV <sub>av</sub>	L
165 Off White	29.49	61.21
170 Light Taupe	22.59	54.65
<b>240</b> Indian Summer	13.42	43.40
<b>550</b> Smoke Blue	17.80	49.25
<b>630</b> Fern	21.64	53.64
<b>640</b> Eucalyptus	21.53	53.53
830 Driftwood	20.37	52.66
975 Pepperwhite	24.63	56.71
985 Northsea	21.24	53,21
990 Granite	9.48	36.89
995 Carbon	10.41	38.57



#### SOLUTION DYED YARNS

BLOQ uses 100% Polyamide 6 Solution Dyed Nylon from **Aquafil**, the best and leading supplier for carpet manufacturers. Solution dyed means better colour fastness and the best results to light and water.







#### **SPECIFICATIONS**

**TYPE OF MANUFACTURE** Tufted Patterned Loop Pile 1/10"

ISO 2424

**PILE FIBER COMPOSITION** 100% Polyamide 6

ISO 2424 Solution Dyed Nylon made by Aquafil

**SECONDARY BACKING** Bitback, Modified Bitumen ISO 2424 70% Recycled Content

**DIMENSION** 50 x 50 cm

EN ISO 24342

PILE WEIGHT 675 g/m<sup>2</sup>

ISO 8543

**SURFACE PILE WEIGHT** 325 g/m<sup>2</sup>

ISO 8543

TOTAL WEIGHT 4 400 g/m<sup>2</sup>

ISO 8543

TOTAL THICKNESS 6.7 mm ISO 1765

PILE HEIGHT 3.2 mm

ISO 1766

PILE DENSITY 0.100 g/m<sup>3</sup>

ISO 8543 NUMBER OF TUFTS 147 000 /m<sup>2</sup>

ISO 1763

**DIMENSIONAL STABILITY**  $\leq 0.2\%$ 

ISO 2551

NUMBER

**OF COLOURS** 

**PACKAGING** Box: 20 tiles / 5 m<sup>2</sup> Pallet: 200 m<sup>2</sup>

#### PERFORMANCE

CLASSIFICATION 33 EN 1307

LUXURY RATING LC1

EN 1307

**CASTOR CHAIR RATING** A: Intensive use

EN 985

FIRE CLASSIFICATION B<sub>a</sub>-s1 EN 13501-1

IMPACT SOUND INSULATION △L,: 26 dB

EN ISO 10140-3

**SOUND ABSORBTION** Frequency Hz 125 250 500 1000 2000 4000 0.00 0.05 0.10 0.20 0.35 0.40 EN ISO 354 as

**NOISE REDUCTION**  $\alpha_w$ : 0.20

EN ISO 354

**PERMANENT ANTISTATIC** ≤ 2 kV

ISO 6356

**TRANSVERSAL RESISTANCE** ≤ 1 X 10<sup>9</sup> Ohm

ISO 10965

THERMAL RESISTANCE 0.0804 m<sup>2</sup> K/W

ISO 8302

COLOUR FASTNESS TO LIGHT  $\geq 7$ EN ISO 105-B02

COLOUR FASTNESS TO WATER  $\geq 4$ 


EN ISO 105-E01

**RUBBING FASTNESS**  $\geq 4$ EN ISO 105-X12


GUT N° PRODIS 3CE0E3FA











All rights reserved to alter technical specifications.

www.bloq.nl BLOQ | De Blokmat 29, 8281 JH Genemuiden, The Netherlands | T+31 38 386 10 60, info@bloq.nl